Benefits

- Automatic dispensing of small volumes
- · Constant delivery of fluids
- Hands free operation
- Better flow performance

Features

- Accuracy ±0.35%
- Holds one or two syringes from 0.5 μ l to 140 ml
- High resolution color touch screen
- · Real time clock
- Unparalleled ease of use
- Touch pad "lock" feature
- LED light on front panel
- · Full metal chassis
- · Built in syringe table
- Up to 75 lbs linear force
- Advanced microstepping techniques
- Built in RS-485 interface to link multiple pumps
- USB port & RS232 Interface
- I/O & TTL interface
- Continuous mode of operation
- Protection with a spill dam
- · Analog control option
- CE, UL, CSA, CB Scheme, EU RoHS

Applications

- Microfluidics
- Drug Discovery
- Nanofluidics
- Polymer Research
- HPLC Mass Spec
- Organic Synthesis
- Electrospinning
- Reactor Injections

Markets

- Pharmaceutical
- Biotech
- Chemical
- Neuroscience
- · Research and Development
- Government
- Petrochemical
- Food and Beverage

KDS Legato[™] 200 Infuse Only Syringe Pump



The NEW KDS Legato[™] 200 series is the next generation of syringe pumps

The KDS Legato 200 Infuse only syringe pump offers unparalleled ease of use through the high resolution touch screen. The basic model works with one syringe or two and can be reconfigured in the field to be used with multiple syringes. The full touch screen interface enables the user to quickly create configurations and recall them for easy use. The 4.3" TFT color display with touch pad interface presents all the pump operating parameters on one easy to view run screen. Protective cover over the display prevents leakage into the display. To optimize your bench space the Legato 200 can be placed on it's side to reduce the footprint by 4 times. The footprint is only 3.5 x 9.75 in. the display also tilts with the change to allow the user to operate the pump vertically.

The Legato 200 is an infuse only syringe pump. It accommodates 2 syringes from 0.5 μ l to 140 ml. User definable flow rates with selectable target volumes or time values to control the total infusion volume. An led light on the front panel makes it easy to see if the pump is running. The programmable model offers maximum flexibility for configuring and running different programs. Up to 40 programs of 20 steps each can be

configured and stored in the unit and recalled quickly with the touch of a button.

The pumps are versatile and can be connected through the RS-485 interface Advanced microstepping techniques are employed to further reduce the step angle to eliminate flow pulsation. The accuracy is $\pm 0.35\%$ A wide dynamic flow range from 5 pl/min to 215.803 ml/min can be programmed into the pump. Add the New Adagio software to maximize the use of the pumps functions and features. Adagio allows you to configure the pump through the software as well as operate one or multiple pumps.

KD Scientific pumps are acknowledged as the industry's highest values solution for delivering precise and smooth flow. KD Scientific is recognized worldwide for quality and reliability at an economical price and has the broadest line of syringe pumps to meet your specific application. KD scientific is committed to delivering the highest level of customer satisfaction, as well as technical support for all their products.


NOTE: KD Scientific syringe pumps are for laboratory use only.



84 October Hill Road • Holliston, MA 01746

Intuitive Run Screen

Combining multiple parameters simultaneously with internationally recognizable icons allow the Legato Series to provide a new level of intuitive syringe pump operation.

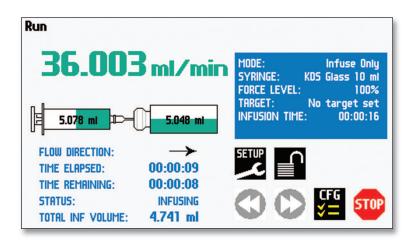

Specifications

Model	KDS Legato 200		
Syringe Size	0.5 μl to 140 ml		
Power	100-240 VAC: 50/60 Hz, 50 W. 0.5 A fuse		
Motor Drive Control	Microprocessor with 1/16 microstepping		
Linear Force (Maximum)	34 kg (75 lbs) @ 100% force selection		
Number of Microsteps per One Revolution of Lead Screw	6400		
Step rate (Minimum)	27.5 sec/μstep		
Step rate (Maximum)	26 μsec/μstep		
Drive Motor	1.8 degree Stepper Motor		
Pusher Travel Rate - (Minimum)	0.36 μm/min		
Pusher Travel Rate - (Maximum)	190.80 mm/min		
Flow Rate (Minimum)	5 pl/min (0.5 μl syringe)		
Flow Rate (Maximum)	215.803 ml/min (140 ml syringe)		
Dimensions	8.89 x 25.4 x 27.94 cm (3.5 x 10 x 11 in)		
Weight	4.9 kg (10.75 lb)		
RS-232 - 9 Pin D-Sub Connector, RS485 - IEEE-1394 6 pos, USB - Type B, I/O & TTL - 15 Pin D-Sub Connector			

Flow Rates

Syringe	Diameter	Minimum	Maximum
0.5 μΙ	0.103 mm	3.12 pl/min	1.589 µl/min
1 μΙ	0.146 mm	6.18 pl/min	3.180 µl/min
2 μΙ	0.206 mm	12.301 pl/min	6.358 μl/min
5 µl	0.343 mm	33.96 pl/min	17.630 μl/min
10 µl	0.485 mm	67.72 pl/min	35.249 μl/min
25 μΙ	0.729 mm	153.42 pl/min	79.640 μl/min
50 μl	1.03 mm	306.24 pl/min	158.984 µl/min
100 μΙ	1.457 mm	612.72 pl/min	318.126 μl/min
250 μΙ	2.304 mm	1.533 nl/ min	795.51 μl/min
500 μl	3.256 mm	3.06 nl/min	1.588 ml/min
1000 μΙ	4.608 mm	6.129 nl/min	3.181 ml/min
1 ml	4.699 mm	6.373 nl/min	3.308 ml/min
3 ml	8.585 mm	21.272 nl/min	11.044 ml/min
5 ml	11.989 mm	41.485 nl/min	21.539 ml/min
10 ml	14.427 mm	60.073 nl/min	31.19 ml/min
20 ml	19.05 mm	104.74 nl/min	54.383 ml/min
30 ml	21.59 mm	134.533 nl/min	69.852 ml/min
50 ml	26.594 mm	204.122 nl/ min	105.985 ml/min
100 ml	35.7 mm	367.839 nl/min	190.992 ml/min
140 ml	38.4 mm	415.623 nl/min	215.803 ml/min

Modular Syringe Racks

Racks can be purchased to create a multichannel syringe pump.



Small Syringe Multi-Rack Option (78-8300)

- Infuse/Withdraw 6/10 Multi-Rack
- Six 30 to 60 ml plastic syringes or ten 0.5 µl to 20 ml syringes
- · Can be sold for Infuse Only as well



Large Syringe Multi-Rack Option (78-8301)

- Infuse/Withdraw 4 x 140 Multi-Rack
- Four 60 to 140 ml syringes
- Can be sold for Infuse Only as well



Microliter Syringe Multi-Rack

Option (78-8302)

- Infuse/Withdraw Microliter Rack
- Four 0.5 µl to 10 ml syringes
- Can be sold for Infuse Only as well



84 October Hill Road • Holliston, MA 01746